



UL Style 1015

PVC Insulated Wire

Description:

Conductor: Stranded Soft Bare or Tinned Copper

Insulation: PVC

Characteristics:

Rating Temperature: 80°C, 90°C or 105°C

Rating Voltage : 600 V. AC ; 750 V. DC


UL VW-1 & CSA FT1, FT2 Flame Test Approved

UL Oil Resistant Test at 60°C Approved

Applications:

For Internal Wiring of Appliances

Construction:

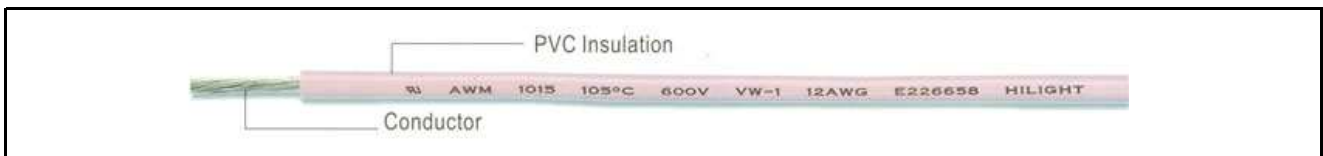

UL/CSA	Rating		Size AWG or MCM	Conductor No./mm	PVC Insulation		Dielectric Voltage KV/1 min.	Standard Length		
	Max. Volt.	Max. Temp.			Thickness Min.Avg. mm	Approx. O.D. mm		FT	M	Packing
1015	600V	105°C	20	11/0.250	0.762	2.7	2.0	328	100	Coil
			18	17/0.250	0.762	2.9	2.0	328	100	Coil
			16	26/0.254	0.762	3.2	2.0	328	100	Coil
			14	41/0.254	0.762	3.6	2.0	328	100	Coil
			12	65/0.254	0.762	4.1	2.0	328	100	Coil
			10	104/0.254	0.762	4.7	2.0	328	100	Coil
			8	165/0.254	1.143	6.7	2.0	328	100	Coil
			6	263/0.254	1.524	8.5	2.0	328	100	Coil
			4	417/0.254	1.524	9.9	2.0	328	100	Coil
			2	664/0.254	1.524	11.6	2.0	328	100	Coil
			1	837/0.254	2.032	14.1	2.5	328	100	Coil
			1/0	1056/0.254	2.032	15.2	2.5	328	100	Coil
			2/0	1331/0.254	2.032	16.6	2.5	328	100	Coil
			3/0	1678/0.254	2.032	18.0	2.5	328	100	Coil
			4/0	2116/0.254	2.032	19.8	2.5	328	100	Coil
			250 MCM	2507/0.254	2.413	21.8	3.0	328	100	Coil
			300	3000/0.254	2.413	23.3	3.0	328	100	Coil
			350	3494/0.254	2.413	24.8	3.0	328	100	Coil
			400	4007/0.254	2.413	26.1	3.0	328	100	Coil
450	4500/0.254	2.413	27.4	3.0	328	100	Coil			
500	4993/0.254	2.413	28.6	3.0	328	100	Coil			